marantz

Quick Start Guide

LINK [] On | Streaming Preamplifier

Before you begin

What's in the box

Quick Start Guide	Streaming Preamplifier	Re Bar	Audio cable	ET.
Safety instructions	Power cord		Remote connector cable	and the second s
Notes on radio	Remote control (RC004PMND)		External antennas for Bluetooth®/Wi-Fi® connectivity	
Warranty (for North America model only)	2× R03/AAA batteries			


Required for setup		Optional		E
Amplifier		HDMI® cable		F
Speakers		Ethernet cable	a particular and a second seco	E
Speaker cables	₽₽ ₽	Computer		
Mobile device		USB cable		
Wi-Fi Router and Internet connection				

Setup



Connect the antennas

- Place the antenna evenly over the antenna terminal located at the upper left or right corner of the rear panel.
- 2 Turn the antenna clockwise until it is fully connected. Do not over tighten.
- 3 Rotate the antenna upwards for the best possible reception.




NOTE

The antennas are required for both Bluetooth and Wi-Fi functions.


Optional

If you are connecting LINK 10n to a wired network, connect an Ethernet cable (not included) between the LINK 10n and your router. Do not connect the Ethernet cable if you are connecting the LINK 10n to a wireless network.

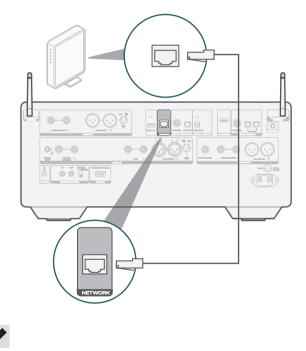

• In step 6 we will guide you how to connect to a wireless network.



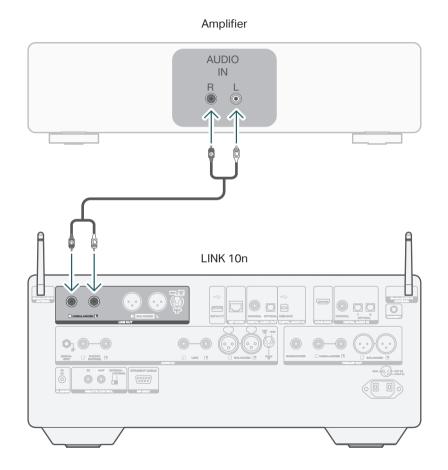

ES



Connect TV audio (optional)


Connect one end of the HDMI cable to the TV port labeled "ARC" or "eARC".

The LINK 10n does not support eARC functionality, however you can still connect it to an eARC port to use ARC functionality.

2 Connect the other end of the HDMI cable to the HDMI ARC port on the back of the LINK 10n.


NOTE

- The TV connection is used to pass audio to the LINK 10n from your TV's built-in sources (tuner, smart TV apps, etc.) and HDMI devices connected to your TV. The LINK 10n does not generate any video output.
- Make sure the audio output section in your TV settings menu is set to output only 2ch PCM audio. Dolby Digital and DTS audio are not supported.

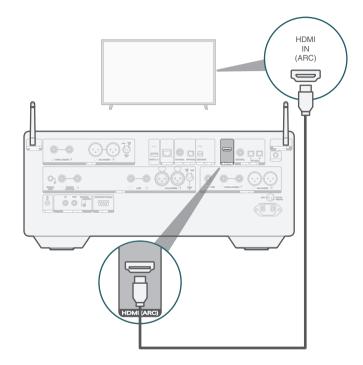





Connect the power cord between the LINK 10n and a wall outlet.

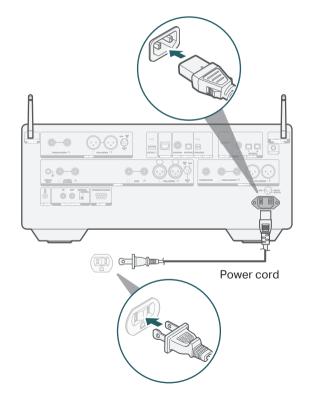



Install batteries in the receiver remote control







• Batteries can be taken out in reversed order.



Use the HEOS app to complete LINK 10n setup

First time setting up HEOS Built-in device



Go to the Apple App Store, Google Play or Amazon App Store and search for "HEOS" to download and install.



Launch the HEOS app and follow the instructions in the app.



I have setup at least one HEOS built-in device on my network

If you already have the HEOS app and have setup at least one HEOS built-in device, please follow the steps below to add the LINK 10n to your wireless network.

Select the Settings **‡** icon in the upper-right corner of the main "Home" menu to display the Settings menu.




Select "Add Device" from the HEOS app's Settings menu and follow the instructions:






 You will need to use the CONNECT button on the rear panel of this unit when connecting this unit to a wireless LAN network. Place this unit in a position where the CONNECT button is within reach until the network configuration is complete. If you cannot reach the CONNECT button, you can also use the HEOS button on the remote control. Instead of the CONNECT button, press and hold the HEOS button for at least 2 seconds.



Enjoy Internet Radio



Enjoy music using Apple AirPlay

- Open Control Center then tap the AirPlay icon in the audio card.
- Select "Marantz LINK 10n" from the AirPlay Device list.
- Choose music to play from your 3 iPhone, iPod touch, iPad or Mac.





ENTER.

- Using the HEOS app to control your device and select your favorite Tuneln radio station to play on your device.
- You can also AirPlay audio from an app you're using on your iOS device. Just open the app, tap the AirPlay icon, then tap a speaker or tap multiple speakers.

FR

ES

Enjoy music using Bluetooth

Press LINK.

mode to this unit.


Activate Bluetooth on your

mobile device.

1

2

3

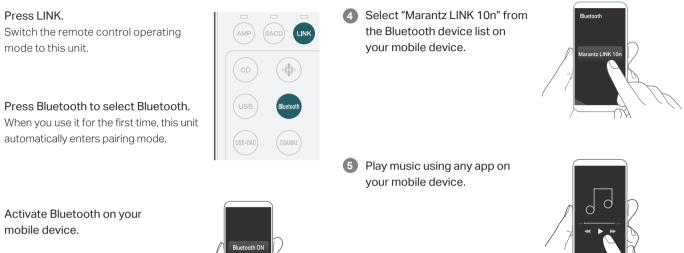



 To pair with other Bluetooth devices, press and hold Bluetooth on the remote control for at least 3 seconds.



Listen to computer audio via USB-DAC

Install the Windows driver software

NOTE

The installation of the driver software is not necessary in the following cases.

- $\ensuremath{\cdot}$ When you do not play back the music from a PC using USB-DAC of this unit.
- When using a macOS.

The driver software cannot be installed correctly if your PC is connected to the unit by a USB cable. If the unit and your computer are connected by a USB cable and the computer is switched on before installation, disconnect the USB and restart the computer.

Windows OS

System requirements : Windows 10 or Windows 11

- Download the dedicated driver from the "Download" section of the LINK 10n page of the Marantz website (www.marantz.com) onto your PC.
- Unzip the downloaded file, and double-click the exe file.



Install the driver.

- ① Select the language to use for the installation.
- Click "OK".



- ③ The wizard menu is displayed. Follow the instructions on the screen.
- 4 When the wizard is completed, click "Finish".




NOTE

Please see the FAQ at **www.marantz.com** if you experience any issues getting audio to play from your computer through the LINK 10n. You may also want to check the support pages for audio player application.



2 Connect to PC or Mac

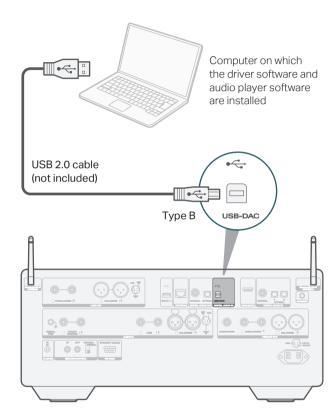

3 Listen to audio from PC or Mac

Press LINK.

Switch the remote control operating mode to this unit.

- Power on.
- Press USB-DAC to switch the input source to "USB-DAC".




Set the audio signal destination to this unit on the computer.

Windows OS

- ① Open the "Control Panel" on the PC.
 - The control panel setting list is displayed.
- 2 Click the "Sound" icon.
 - The sound menu window is displayed.

- ③ Check that there is a checkmark next to "Default Device" under in "LINK 10n" of the "Playback" tab.
 - When there is a checkmark for a different device, click "LINK 10n" and "Set Default".
- (4) Select "LINK 10n" and click "Properties".
 - The LINK 10n properties window is displayed.



- (5) Click the "Advanced" tab.
- (6) Select the sampling rate and bit rate to be applied to the D/A converter.
 - It is recommended that "2 channel, 32 bit, 192000 Hz (Studio Quality)" is selected.
- Click "Apply".
- (8) Click "Test".
 - Check that audio from this unit is output from the PC.

	Supported Formats	1.01/000
Enhancements	Advanced	Spati (5)
Default Format		
Select the cample	rate and bit depth to be us	ed when running
in shared mode.	Tate and bit depth to be as	ea when ranning
in pharea moder		
2 channel, 32 bi	, 192000 Hz (Studio Quality)	∨ ►]est
2 channel 16 bit	, 44100 Hz (CD Quality)	
	48000 Hz (DVD Quality)	
	88200 Hz (Studio Quality)	
	96000 Hz (Studio Quality)	
2 channel, 16 bit	176400 Hz (Studio Quality)	this (8)
	, 192000 Hz (Studio Quality)	
	, 44100 Hz (Studio Quality)	
	, 48000 Hz (Studio Quality)	
	, 88200 Hz (Studio Quality)	
	, 96000 Hz (Studio Quality)	
	, 176400 Hz (Studio Quality) , 192000 Hz (Studio Quality)	
	, 44100 Hz (Studio Quality)	(6)
	48000 Hz (Studio Quality)	
	88200 Hz (Studio Quality)	
	96000 Hz (Studio Quality)	
2 channel, 32 bit	176400 Hz (Studio Quality)	
2 channel, 32 bit	, 192000 Hz (Studio Quality)	
Restore Deraute		


macOS

System requirements: macOS 13 or 14

- Move the cursor to "Go" on the computer screen, and then click "Utilities".
 - The utility list is displayed.
- 2 Double-click "Audio MIDI Setup".
 - The "Audio Devices" window is displayed.
- ③ Secondary click on "LINK 10n", and then check that "Use This Device For Sound Output" is checked.
 - If a different device is checked, select and secondary click on "LINK 10n", and then select "Use This Device For Sound Output".

	Audio Devices			
LINK 10n 0 ins / 2 outs	LINK 10n			?
MacBook Air Microphone	onfigure Device onfigure Speakers Loron policie La Connel Book Uter The Device For Sound Control 1994 Anter and Sound Effects Through This Device Mater d'array Mater	Value 	dB 0.0 0.0 0.0	Mute
		Configure	Speake	:rs
+ - o •				

- ④ Select the "LINK 10n" format.
 - It is normally recommended to set the format to "2 ch 32-bit Integer 384.0 kHz".



5 Quit Audio MIDI Setup.



4 Use your favorite music applications on your PC/Mac to play audio through the LINK 10n.

For high resolution audio playback you will need to obtain an advanced audio player software such as JRiver Media Center or Audirvana.

NOTE

Additional settings to output audio to the LINK 10n may have to be selected in your advanced audio player application. Please refer to the user's manual for your application.

ES

Contact Marantz

L 1-800-654-6633

We hope you will enjoy your Marantz product for years to come. If you ever have any question or need any support, just get in touch via the free helpline. We are happy if you are happy.

In case you can't reach the helpline please check the support section on **www.marantz.com** for more information.

Owner's manual

Refer to the online manual for other functions, information and operation procedure details. manuals.marantz.com/LINK10n/NA/EN/

Trademark information



Apple, AirPlay, iPad, iPad Air, iPad Pro, iPhone and Mac are trademarks of Apple Inc., registered in the U.S. and other countries. The trademark "iPhone" is used in Japan with a license from Aiphone K.K.

Use of the Works with Apple badge means that an accessory has been designed to work specifically with the technology identified in the badge and has been certified by the developer to meet Apple performance standards.



The Bluetooth® word mark and logos are registered trademarks owned by the Bluetooth SIG, Inc. and any use of such marks by DEI Sales, Inc. is under license. Other trademarks and trade names are those of their respective owners.



The Wi-Fi CERTIFIED logo is a registered trademark of the Wi-Fi Alliance. Wi-Fi Certification provides assurance that the device has passed the interoperability test conducted by the Wi-Fi Alliance, a group that certifies interoperability among wireless LAN devices.



The terms HDMI, HDMI High-Definition Multimedia Interface, HDMI trade dress and the HDMI Logos are trademarks or registered trademarks of HDMI Licensing Administrator, Inc.



App Store® is registered in the U.S. and other countries.



Google Play and the Google Play logo are trademarks of Google LLC.

FR

ES

marantz

Printed in Japan 5411 12118 00AS © 2024 Masimo. All Rights Reserved.